

①After installing the UsbAudio_ASIO driver, update the firmware of your LEAKTO effects pedal to the latest version (current version: V1.1.3) before use. Otherwise, the device will not be detected by the system.

② For the USB cable connecting the device to your computer, use the original factory-supplied cable. If the original cable is lost, use a USB 2.0 or higher specification data cable. Charge-only cables cannot enable device recognition.

③LEKATO effects pedal supports 24-bit/48 kHz USB audio and OTG functions. It can be connected to a computer or mobile device for recording and playback, and is compatible with both Windows and Mac operating systems.
Windows users need to install an ASIO driver for low-latency recording andmonitoring.

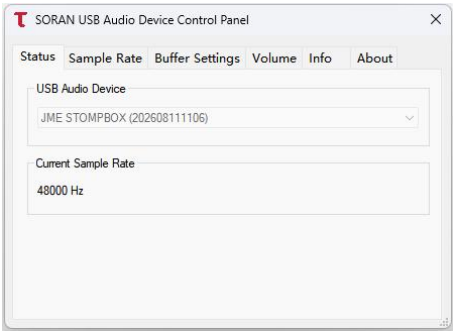

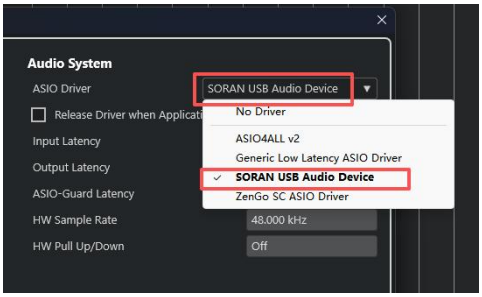

④Mac users do not need to install any driver, as the system is plug-and-play with Core Audio.

